



300 Series Regulators

322 SERIES

The 322 Series regulators are intended for primary pressure control of ultra-high purity and corrosive gases in applications where minor fluctuations in outlet pressure due to diminishing inlet supply can be tolerated.

- Single Stage
- 316L Stainless Steel Barstock Body
- Four Port Configuration
- 316L Stainless Steel Diaphragm

Typical Applications

Gas and liquid chromatography


High purity carrier gases

Zero, span, and calibration gases

High purity chamber pressurization

Liquefied hydrocarbon gas control

Control of cryogenic gases

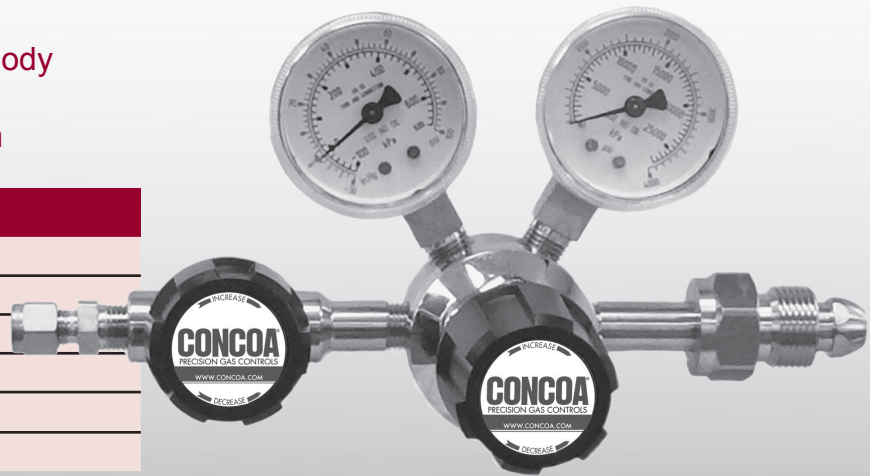

322 2331-580 shown

Features

CAPSULE® Seat

Increased serviceability and life

316L Stainless Steel Diaphragm

No inboard diffusion

Low Wetted Surface Area

Minimal purge requirements

Field-Adjustable Pressure Limit

Safeguard downstream equipment

Convolute Diaphragm

Smooth pressure changes

Compact Design

Easily transported and integrated into systems

316L Stainless Steel Barstock Body

Increased corrosion resistance

Rear Panel-Mountable

Easy installation

Pressure Ranges 0-15 to 0-500 PSIG (0-1 to 0-35 BAR)

Broad range of applications

Materials

Body

316L stainless steel barstock

Bonnet

Chrome-plated die-cast zinc

Seat

PTFE

PCTFE with 3500 PSIG (240 BAR) or 4500 PSIG (310 BAR) inlet option

Filter

Patented 10 micron 316 mesh

Diaphragm

316L stainless steel

Internal Seals

PTFE

Specifications

Maximum Inlet Pressure

3000 PSIG (210 BAR)
3500 PSIG (240 BAR) optional
4500 PSIG (310 BAR) optional

Temperature Range

-40°F to 140°F (-40°C to 60°C)

Gauges

2" (53mm) diameter
Chrome-plated brass case
Stainless steel internals

Ports

1/4" FPT

Helium Leak Integrity

1 x 10⁻⁸ scc/sec

Cv

0.1

See page 202 for flow curves


Weight (322 2331-580)

3.0 lbs. (1.34 kg)

300 Series Regulators



Installation Dimensions

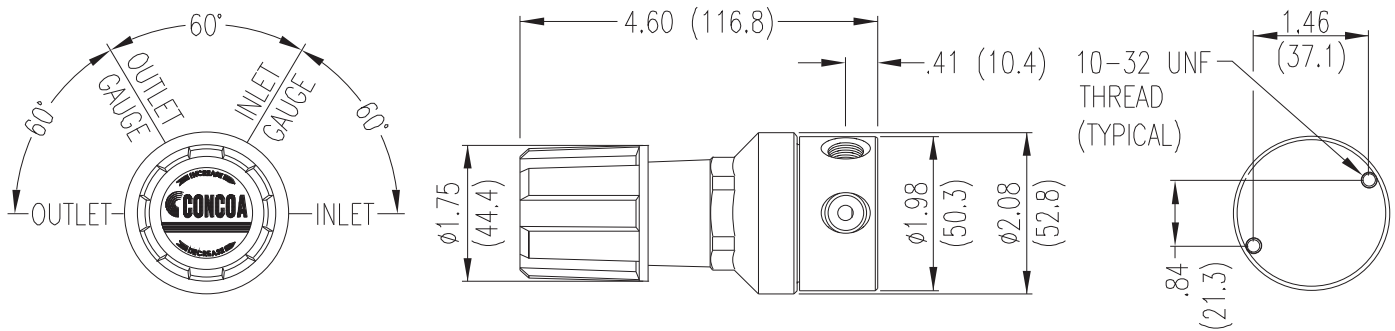

REGULATORS

Ordering Information

322	A	B	C	D	-CON	Options	
Series 322	Outlet Pressure	Outlet Gauge	Inlet Gauge	Outlet Assemblies	Assembly Gauges	Inlet Connections	Installed Options
	1: 0-15 PSIG (0-1 BAR)*	30"-0-30 PSIG/ -1-0-2 BAR	0: None	0: 1/4" FPT port	0: Bare body	000: 1/4" FPT	B: Protocol alarm station (110/220 VAC)
	2: 0-50 PSIG (0-3.5 BAR)	30"-0-100 PSIG/ -1-0-7 BAR	3: 0-4000 PSIG/ 0-310 BAR	1: 1/4" MPT	1: Standard assembly (PSIG/kPa gauges)	TF2: 1/8" tube	C: Protocol switchover station
	3: 0-100 PSIG (0-7 BAR)	30"-0-200 PSIG/ -1-0-14 BAR	5: 0-1000 PSIG/ 0-70 BAR	3: Diaphragm valve 1/4" tube fitting		TF6: 3/8" tube	H: Protocol switchover station with alarm (110/220 VAC)
	4: 0-250 PSIG (0-17 BAR)	0-400 PSIG/ 0-14 BAR	6: 0-300 PSIG/ 0-21 BAR	4: Diaphragm valve 1/4" MPT		M06: 6mm tube	M: Protocol station
	5: 0-500 PSIG (0-34 BAR)	0-1000 PSIG/ 0-70 BAR	7: 0-400 PSIG/ 0-27 BAR	5: Needle valve 1/4" MPT		CGA 477 BS 341 and others available	Q: Protocol purge station*
	7: 0-150 PSIG (0-10 BAR)	30"-0-200 PSIG/ -1-0-14 BAR	8: 0-6000 PSIG/ 0-415 BAR*	6: 1/8" tube fitting			T: Tee purge*
	<i>*Not available with 4500 PSIG (310 BAR) maximum inlet pressure</i>		G: 0-4000 PSIG/ 0-275 BAR [†]	7: 3/8" tube fitting			<i>*Not available with 4500 PSIG (310 BAR) max inlet pressure</i>
		<i>*Maximum inlet pressure 4500 PSIG (310 BAR) with PCTFE Seat CAPSULE®</i>		8: Diaphragm valve 1/8" tube fitting			
				9: Diaphragm valve 1/4" FPT			
		<i>†Maximum inlet pressure 3500 PSIG (240 BAR) with PCTFE seat CAPSULE</i>		M: 6mm tube fitting			
				S: Diaphragm valve 6mm tube fitting			

Related Options

Order No.	Description
835 0204	Rear panel mount kit

