



# Pressure Differential Switchovers


# 526 SERIES

## Switchover

The 526 Series Switchover is an automatic switchover system designed to supply a continuous supply of high purity, non-corrosive gas. The system comes with either flexible hoses for use with two cylinders or manifold connectors for use with the Maniflex Modular Manifold System. Due to pressure differential considerations, an integral line regulator is available to maintain constant downstream pressure.

### Typical Applications

- Ultra-high purity gases
- Gas chromatograph carrier and support gases
- AA grade acetylene
- Cell culture incubator Carbon Dioxide and Nitrogen
- Pure and mixed process gases
- Central gas supply system for laboratory, research or process plants

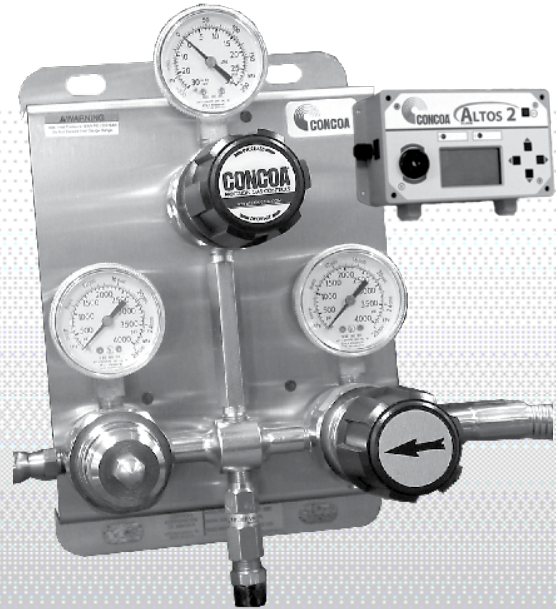

526 411G shown with attached flexible hoses. Available with optional remote alarm.

### Features

- 400 Series Brass Barstock Regulators**  
CAPSULE® seat
- Metal-to-Metal Diaphragm Seal**  
No possibility of gas contamination
- User-Friendly**  
One knob switches cylinder priority
- Check Valves in Hose Inlet Glands**  
Prevents contamination and back flow
- Compatible with Maniflex Manifolds**  
Multiple cylinders per side
- Optional Line Regulator**  
Stable line pressure during change over
- Optional Remote Alarm**  
Easy integration with Altos system  
CE marked universal voltage alarm
- Optional Purge Valves**  
Allows purging after cylinder change over
- Optional Outlet Valve**  
Allows isolation of pipeline

### Materials

- Bodies**  
Brass barstock
- Diaphragms**  
316L stainless steel
- Seats**  
PTFE (line regulators)  
PTFE with 3000 PSIG (240 Bar) (inlet regulators)  
PCTFE with 4500 PSIG (310 BAR) (inlet regulators)
- Filters**  
10 micron sintered bronze
- Internal Seals**  
PTFE

### Specifications


- Maximum Inlet Pressure**  
3000 PSIG (210 BAR)  
4500 PSIG (310 BAR) optional
- Temperature Range**  
-40°F to 140°F (-40°C to 60°C)
- Gauges**  
2" (53mm) diameter brass
- Outlet Connection**  
1/4" MPT (without line regulator)  
1/4" FPT (with line regulator)
- Transducers**  
0-6000 PSIG (4-20 mA output)  
Optional intrinsically safe models
- Helium Leak Integrity**  
1 x 10<sup>-8</sup> scc/sec
- Cv**  
0.1
- Weight**  
8.25 lbs. (3.71 kg)

CRN 0H15806.5

# Pressure Differential Switchovers



## Installation Information

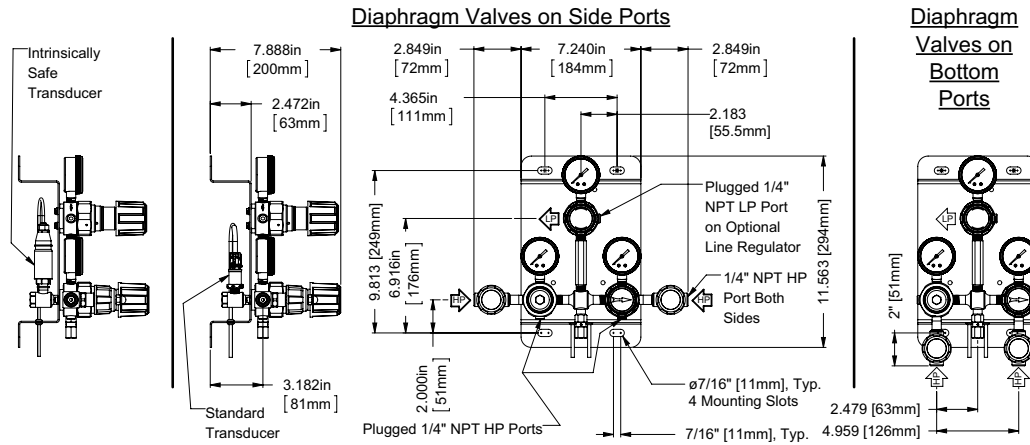

## Ordering Information

526	A	B	C	D	-CON	Optional
Series 526	Switching Pressure (Priority R/L)	Inlet Connection	Line Regulator	Assembly	Hose	
	<b>1:</b> 125/105 PSIG* (8.4/7.1 BAR)	<b>0:</b> 1/4" FPT ports	<b>0:</b> None	<b>1:</b> 0-4000 PSIG/0-28,000 kPa gauges no alarm capability*	Please specify inlet connection (if applicable)  CGA DIN 477 BS 341 and others available	<b>A:</b> Outlet valve
	<b>2:</b> 70/50 PSIG* (4.8/3.5 BAR)	<b>1:</b> 36" (900mm) stainless steel flexible hoses	<b>1:</b> 0-15 PSIG (0-1 BAR)	<b>2:</b> 0-4000 PSIG/0-275 BAR gauges no alarm capability*		<b>B:</b> Outlet valve and purge valve
	<b>3:</b> 100/75 PSIG (6.8/5.1 BAR)	<b>2:</b> Manifold connectors*	<b>2:</b> 0-50 PSIG (0-3.5 BAR)	<b>5:</b> 0-600 PSIG/0-40 BAR gauges no alarm capability		<b>V:</b> Purge valves
	<b>4:</b> 200/170 PSIG (13.5/11.5 BAR)	<b>3:</b> 24" (600mm) stainless steel flexible hoses	<b>3:</b> 0-100 PSIG (0-7 BAR)	<b>8:</b> 0-4000 PSIG/0-275 BAR gauges* with pressure switches and without remote alarm		
	<b>5:</b> 500/470 PSIG (33.8/31.8 BAR)	<b>4:</b> Diaphragm valves with 1/4" FPT port	<b>4:</b> 0-250 PSIG (0-17 BAR)	<b>9:</b> 0-600 PSIG/0-40 BAR gauges with pressure switches and without remote alarm		
	<b>7:</b> 150/130 PSIG (10.1/8.8 BAR)	<b>5:</b> Diaphragm valves with 36" (900mm) hoses	<b>5:</b> 0-400 PSIG (0-27 BAR)	<b>G:</b> 0-4000 PSIG/0-280 BAR gauges* with Altos 2 alarm and standard transducers (not intrinsically safe)		
	<b>8:</b> 300/270 PSIG (20.3/22.3 BAR)	<b>6:</b> Diaphragm valves with manifold connectors*	<b>7:</b> 0-150 PSIG (0-10 BAR)	<b>H:</b> 0-600 PSIG/0-42 BAR gauges with Altos 2 alarm and standard transducers (not intrinsically safe)		
	<i>*Not available with 4500 PSIG (310 BAR) inlet</i>	<b>7:</b> Diaphragm valves with 24" (600mm) hoses	<b>A:</b> 0-15 PSIG (0-1 BAR) reline for acetylene	<b>J:</b> 0-4000 PSIG/0-280 BAR gauges* with standard transducers (not intrinsically safe) - alarm not included		
	<i>Note: Switching pressure must be higher than line regulator pressure selected in column C.</i>	<b>8:</b> 36" (900mm) stainless steel flexible hoses and 4500 PSIG (310 BAR) maximum inlet pressure		<b>K:</b> 0-600 PSIG/0-42 BAR gauges with standard transducers (not intrinsically safe) - alarm not included		
		<b>9:</b> 1/4" FPT ports and 4500 PSIG (310 BAR) maximum inlet pressure		<b>L:</b> 0-4000 PSIG/0-280 BAR gauges* with Altos 2 alarm and intrinsically safe transducers and barriers		
		<b>A:</b> 36" (900mm) stainless steel flexible hoses with flashback arrestor for acetylene		<b>M:</b> 0-600 PSIG/0-42 BAR gauges with Altos 2 alarm and intrinsically safe transducers and barriers		
		<b>B:</b> 36" (900mm) stainless steel flexible hoses with flashback arrestor for acetylene and with diaphragm valve		<b>N:</b> 0-4000 PSIG/0-280 BAR gauges* with intrinsically safe transducers and barriers - alarm not included		
		<b>C:</b> Compact manifold connector*		<b>P:</b> 0-600 PSIG/0-42 BAR gauges with intrinsically safe transducers and barriers - alarm not included		
		<b>D:</b> Diaphragm valves with compact manifold connectors*		<i>*If 4500 psi model (B=8 or 9) is selected then the 4000 PSIG/280 BAR becomes 0-6000 PSIG/0-400 BAR</i>		
		<i>*See pages 70-71 for manifold ordering information</i>		<i>Note: Intrinsically safe transducers and barriers are required for flammable gas service or for use in hazardous environments.</i>		

DISTRIBUTION SYSTEMS