

## Flexible Hoses

The 529 Series flexible hoses are intended for use in systems where a flexible connection is preferable to the use of rigid tubing. Most commonly, flexible hoses are used as hoses to connect cylinders to wall-mounted regulators or manifold headers.



### Materials and Specifications

**Minimum Bend Radius**  
3.0"

**Temperature Range**  
-450°F to 1500°F (-265°C to 815°C)

**Oxygen Service**  
Cleaned to CGA G4.1 specifications


### Ordering Information

Order No.	Inner Core	Connection	Max Pressure	Length
529 0029-CGA*	316L stainless steel	1/4" MPT x 316L stainless steel CON (with check valve)	3850 PSIG (265 BAR)	3 feet
529 0031-CGA*	316L stainless steel	1/4" MPT x brass CON (with check valve)	3850 PSIG (265 BAR)	3 feet
529 0055-CGA*	316L stainless steel	1/4" MPT x brass CON (with check valve)	3850 PSIG (265 BAR)	6 feet
529 0056-CGA*	316L stainless steel	1/4" MPT x 316L stainless steel CON (with check valve)	3850 PSIG (265 BAR)	6 feet
529 0071-CGA*	316L stainless steel	1/4" MPT x brass CON (with check valve)	3850 PSIG (265 BAR)	2 feet
529 0070-CGA*	316L stainless steel	1/4" MPT x 316L stainless steel CON (with check valve)	3850 PSIG (265 BAR)	2 feet
529 0058-CGA	316L stainless steel	1/4" MPT x brass CON (with check valve)	4500 PSIG (300 BAR)	3 feet
529 0059-CGA	316L stainless steel	1/4" MPT x 316L stainless steel CON (with check valve)	4500 PSIG (300 BAR)	3 feet
529 0064-CGA	PTFE	1/4" MPT x 316L stainless steel CON (with check valve)	6000 PSIG (415 BAR)	3 feet

\*Inner core Mone® with CGA 540

## Cryogenic Hoses

Specifically designed for the transfer of cryogenic gases, these all stainless hoses offer complete flexibility, durability and fast cool-down. Machined end connections and a long collar extend the hose life, and low profile corrugations provide faster filling, lower pressure drop and less product loss. Full armor casing protects the hose from abrasion and damage.

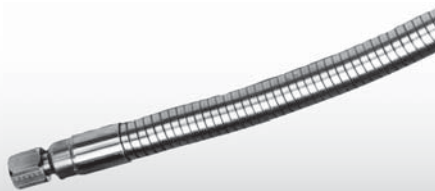

### Materials and Specifications

**Minimum Bend Radius**  
3.25"

**Temperature Range**  
-450°F to 1500°F (-265°C to 815°C)

**Oxygen Service**  
Cleaned to CGA G4.1 specifications

### Ordering Information

Order No.	Inner Core	Connection	Max Pressure	Length
529 0245	316L stainless steel	316L stainless steel CGA 440	1000 PSIG (70 BAR)	4 feet
529 0246	316L stainless steel	316L stainless steel CGA 440	1000 PSIG (70 BAR)	5 feet
529 0247	316L stainless steel	316L stainless steel CGA 440	1000 PSIG (70 BAR)	6 feet
529 0250	316L stainless steel	316L stainless steel CGA 295	1000 PSIG (70 BAR)	4 feet
529 0251	316L stainless steel	316L stainless steel CGA 295	1000 PSIG (70 BAR)	5 feet
529 0252	316L stainless steel	316L stainless steel CGA 295	1000 PSIG (70 BAR)	6 feet