

# 580 SERIES



## Handheld Leak Detector

Perfect for evaluating the leak integrity of laboratory installations, the handheld leak detector by Restek is designed to detect helium, nitrogen, argon, carbon dioxide, and hydrogen. Featuring a sleek, ergonomic design, the detector boasts rugged side grips for added durability. Automatic shut-off preserves battery life while not in use, and a convenient case is included for storage. Backed by a one year manufacturer's warranty, the leak detector sets the industry standard for performance and affordability in a hand-held leak detector.



### Specifications

<b>Detection Limit</b>	1 x 10 <sup>-5</sup> scc/sec He	<b>Certifications</b>	CE, Ex, Japan
<b>Operating Temperature</b>	32°F to 120°F (0°C to 48°C)	<b>Compliance</b>	WEEE, RoHS
<b>Battery Rating</b>	12 hours (normal operation)		
<b>Operating Temperature</b>	32°F to 120°F (0°C to 48°C)		
<b>Power Requirements</b>	3.7 VDC, 60 mA (universal power adapter included)		

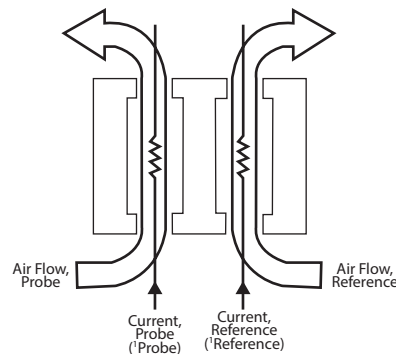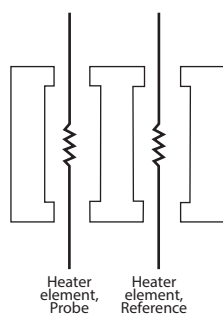

### Ordering Information

Order No.	Description
580 3003	Handheld leak detector