

52L SERIES MICROMANIFOLD



The 52L Series MicroManifold is a flexible non-corrosive gas distribution system that can function as either a gas or vent manifold. Configured as a gas manifold, the 52L offers excellent gaseous flow capacity from liquid cans or high-pressure cylinders to a CONCOA pressure control device. Configured as a vent manifold, the 52L equalizes the headspace pressure across connected liquid cylinders. This allows each cylinder to withdraw equally and operate at maximum flow capacity with minimal product loss.

Typical Applications

- Bioreactor Supply
- Large Incubator Installations
- High Flow Purge Gas Supply
- Gas Delivery from High Pressure Cylinder Supply
- Gas Delivery and Vent Manifold from Liquid Cylinder Supply



52L 1053-580 shown

Features

Safety Disk protects manifold from overpressurization

Compact Modular Design supports future growth capability

Multiple Cylinder Hose Options permits universal gas compatibility

Materials and Specifications

Maximum Inlet Pressure: 3000 PSIG (210 BAR); or 4500 PSIG (310 BAR) optional

Body: Brass barstock

Inlet Connections: Four 1/4 in FNPT; One 1/2 in FNPT

Outlet Connection: 1/2 in MNPT


Flexible Hoses: 316L stainless steel; Monel® inner core for oxygen service

Temperature Range: 0°F to 140°F (-18°C to 60°C)

Weight: 4.2 lbs (1.9 kg)

Conformances: CRN OH15806.5

52L SERIES GAS MICROMANIFOLD

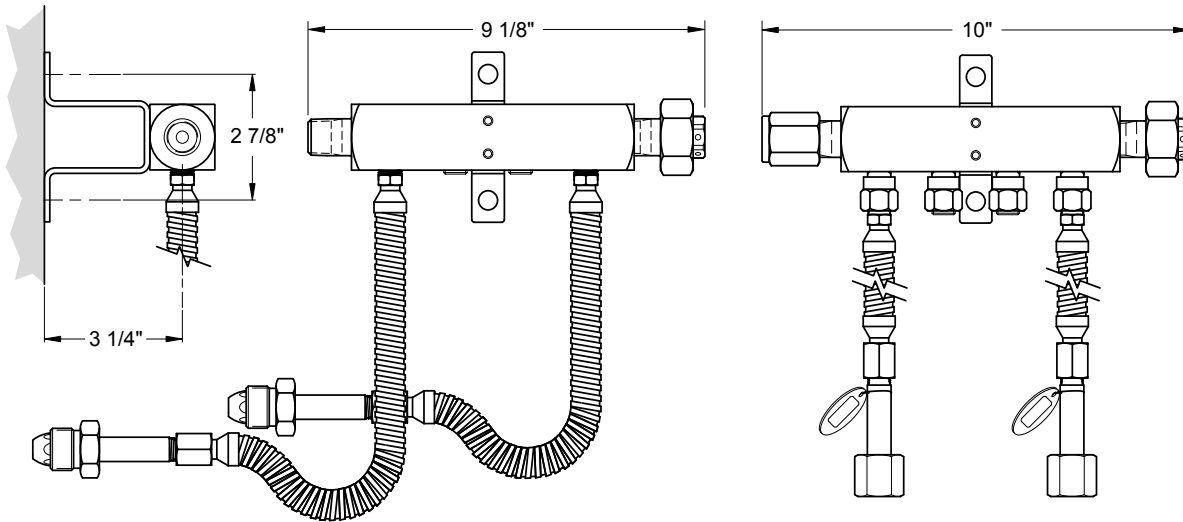

52L-1152-580 MicroManifold

52L-1152-580 MicroManifold

Ordering Information

52L	A	B	C	D	-CON
Series 52L	Manifold Type (Gauge)	Orientation	Hose Style	Cylinder Side	Inlet Connections
	1: Gas MicroManifold (No gauges)	0: Simplex right bank	0: No hose	1: One	<i>Please specify inlet connection.</i>
	2: Vent MicroManifold (No gauges)	1: Simplex left bank	3: 72" (1800mm) flexible stainless steel core and armor cased**	2: Two	
	3: Gas MicroManifold (0-400 PSIG/0-2500 kPa gauges)	2: Duplex right and left bank	5: 36" (900mm) flexible stainless steel core and armor cased**	3: Three	<i>Use -001 for hoses option 0.</i>
	4: Gas MicroManifold (0-600 PSIG/0-40 BAR gauges)	3: Simplex right bank with pressure switch gauge*	7: 24" (600mm) flexible stainless steel core and armor cased**	4: Four	
	5: Gas MicroManifold (0-4000 PSIG/0-2500 kPa gauges)	4: Simplex left bank with pressure switch gauge	A: 72" Flexible Stainless Steel-Braided with PTFE Core (CGA 622, 624) or Stainless Steel Core and Armor Cased (CGA 295, 440) for liquid cylinder vent use†	5: Five	<i>Use CGA 295, 440, 622, or 624 for hose style A</i>
	6: Gas MicroManifold (0-4000 PSIG/0-280 BAR gauges)	5: Duplex right and left bank with pressure switch gauge*	K: 72" (1800mm) stainless steel core and armor cased††	6: Six	
	7: Gas MicroManifold (0-6000 PSIG/0-40,000 kPa gauges)	*Valid with Manifold Type 4, 6, and 8	L: 36" (900mm) stainless steel core and armor cased††	7: Seven	
	8: Gas MicroManifold (0-6000 PSIG/0-420 BAR)		**Valid with Manifold Type 1, 3, 4, 5, and 6 †Valid with Manifold Type 2 ††Valid with Manifold Type 1, 7, and 8	8: Eight	
				0: Zero	

Related Options

Part Number	Option	Description
829 9960	Burst Disk Kit	1/2" MNPT replacement burst disk kit
830 7437	Floor Stand	Single manifold floor stand provides support for up to two consecutive manifold extensions